(51) International Patent Classification 6 :		(11) International Publication Number:	**WO 98/36598**
H04Q 7/36	**A1**	(43) International Publication Date:	20 August 1998 (20.08.98)

(54) Title: METHOD AND APPARATUS FOR DIRECTIONAL RADIO COMMUNICATION
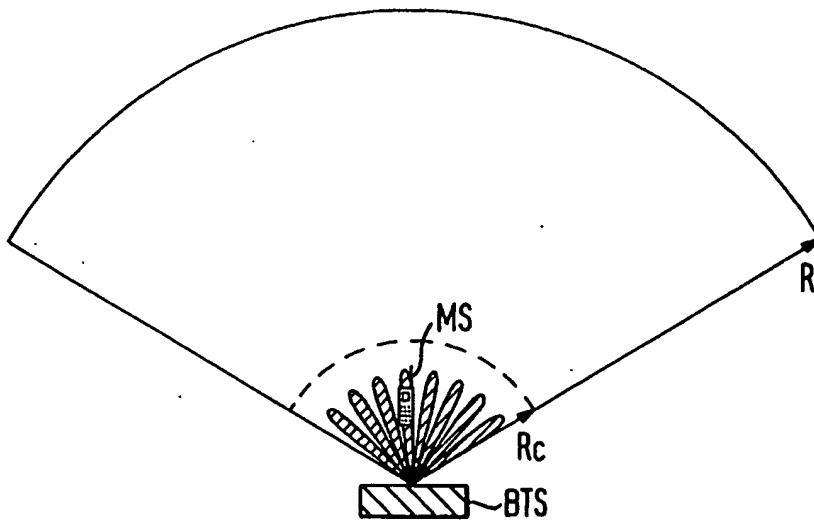
(57) Abstract

A method of directional radio communication in a mobile communication network between a first station and a second mobile station includes the following steps. Signals transmitted by the second station is received at the first station. A parameter representative of the distance between the second station and the first station is monitored. A signal beam is transmitted from the first station to the second station, the angular spread of the signal beam transmitted by the first station being dependent on the distance between the first and second stations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5

METHOD AND APPARATUS FOR DIRECTIONAL RADIO COMMUNICATION

The present invention relates to a method and apparatus for directional radio communication in which signals between a first
10   station and a second station may be transmitted only in certain directions. In particular, but not exclusively, the present invention is applicable to cellular communication networks using space division multiple access.

15   With currently implemented cellular communication networks, a base transceiver station (BTS) is provided which transmits signals intended for a given mobile station (MS), which may be a mobile telephone, throughout a cell or cell sector served by that base transceiver station. However, space division multiple
20   access (SDMA) systems have now been proposed. In a space division multiple access system, the base transceiver station will not transmit signals intended for a given mobile station throughout the cell but will only transmit the signal in the beam direction from which a signal from the mobile station is
25   received. SDMA systems may also permit the base transceiver station to determine the direction from which signals from the mobile station are received.

SDMA systems may allow a number of advantages over existing
30   systems to be achieved. In particular, as the beam which is transmitted by the BTS may only be transmitted in a particular direction and accordingly may be relatively narrow, the power of the transceiver can be concentrated into that narrow beam. It is believed that this results in a better signal to noise ratio
35   with both the signals transmitted from the base transceiver station and the signals received by the base transceiver station. Additionally, as a result of the directionality of the base transceiver station, an improvement in the signal to interference ratio of the signal received by the base transceiver station can
40   be achieved. Furthermore, in the transmitting direction, the directionality of the BTS allows energy to be concentrated into a narrow beam so that the signal transmitted by the BTS can reach far away located mobile stations with lower power levels than

2

required by a conventional BTS. This may allow mobile stations to operate successfully at greater distances from the base transceiver station which in turn means that the size of each cell or cell sector of the cellular network can be increased. As a consequence of the larger cell size, the number of base stations which are required can also be reduced leading to lower network costs. SDMA systems generally require a number of antenna elements in order to achieve the required plurality of different beam directions in which signals can be transmitted and received. The provision of a plurality of antenna elements increases the sensitivity of the BTS to received signals. This means that larger cell sizes do not adversely affect the reception of signals by the BTS from mobile stations.

SDMA systems may also increase the capacity of the system, that is the number of mobile stations which can be simultaneously supported by the system is increased. This is due to the directional nature of the communication which means that the BTS will pick up interference from mobile stations in other cells using the same frequency. The BTS will generate less interference to other mobile stations in other cells using the same frequency when communicating with a given MS in the associated cell.

Ultimately, it is believed that SDMA systems will allow the same frequency to be used simultaneously to transmit to two or even more different mobile stations which are arranged at different locations within the same cell. This can lead to a significant increase in the amount of traffic which can be carried by cellular networks.

SDMA systems can be implemented in analogue and digital cellular networks and may be incorporated in the various existing standards such as GSM, DCS 1800, TACS, AMPS and NMT. SDMA systems can also be used in conjunction with other existing multiple access techniques such as time division multiple access (TDMA), code division multiple access (CDMA) and frequency

3

division multiple access (FDMA) techniques.

One problem with SDMA systems is that the direction in which signals should be transmitted to a mobile station needs to be determined. In certain circumstances, a relatively narrow beam will be used to send a signal from a base transceiver station to a mobile station. Therefore, the direction of that mobile station needs to be assessed reasonably accurately. One problem with SDMA systems is that although the signals from mobile stations which are beyond a certain distance from the BTS are generally only received from one or only a few different beam directions, signals from mobile stations which are relatively close to base transceiver stations appear to come from a large number of beam directions. This is because the signals from the mobile station are reflected from, for example, nearby buildings and a relatively large number of those reflected signals will be received by the base transceiver station from a large number of different beam directions.

An additional problem is that the direction in which a signal is to be transmitted by the BTS to the mobile station is determined on the basis of the uplink signals received by the BTS from the mobile station. However, the frequencies of the downlink signals transmitted from the mobile station to the BTS are different from the frequencies used for the signals transmitted by the BTS to the mobile station. The difference in the frequencies used in the uplink and downlink signals means that the behaviour of the channel in the uplink direction may be different from the behaviour of the channel in the downlink direction. Thus the optimum direction determined for the uplink signals will not always be the optimum direction for the downlink signals.

It is therefore an aim of certain embodiments of the present invention to address difficulties caused by these problems.

According to a first aspect of the present invention, there

4

is provided a method of directional radio communication in a
mobile communication network between a first station and a second
mobile station, said method comprising the steps of:

receiving at said first station a signal transmitted by said
second station;

monitoring a parameter representative of the distance
between the second station and the first station; and

transmitting a signal beam from said first station to said
second station, wherein the angular spread of the signal beam
transmitted by the first station is dependent on the distance
represented by said parameter.

By varying the angular spread of the signal beam transmitted
by the first station in dependence on the distance parameter
between the first and second stations, the difference in
behaviour resulting from the second station either being close
to or far from the first station can be compensated for.

The distance parameter may be monitored at the first
station. Preferably, the distance parameter is determined based
on signals received by the first station from the second station.
In one embodiment, the distance parameter is the angular spread
of the signal received by the first station from the second
station. When the first station is relatively far from the
second station, the signal received by the first station will
have a relatively small angular spread whilst if the second
station is relatively close to the first station, the signal will
be received with a relatively large angular spread. It should
be appreciated that this technique will not give an absolute
indication of the distance but will nevertheless provide
sufficient information in order to allow the angular spread of
the signal beam to be transmitted by the first station to be
determined.

. In an alternative embodiment, the distance parameter is
determined based on the length of time taken for the signal from
the second station to reach the first station. Said distance

5

5   parameter may be timing advance information which is normally
    provided for controlling communication of data between the mobile
    station and the first station. For example, if embodiments of
    the present invention were used in conjunction with cellular
    communication networks using a time division multiple access
10 system, the signal from the second station would be allocated a
    predetermined time slot. Timing advance information ensures that
    the signal which is transmitted by the second station is within
    its allocated time slot. It is unlikely that this will be an
    absolute distance measurement but will indicate an approximate
15 distance between the first and second stations.

    It should be appreciated that in some embodiments the
    distance parameter can be independently determined and that
    information can then be used by the first station to determine
20 the angular spread of the signal.

    Preferably, the angular spread of the radiation beam is
    selectable from a first relatively wide beam and a second
    relatively narrow beam, wherein the first wide beam is selected
25 if the distance between the first station and the second station
    is less than a predetermined distance and the second beam is
    selected if the distance between the first station and the second
    station is less than the predetermined distance. The
    predetermined distance may be set depending on the environment
30 between the first and second station. In one embodiment, there
    may only be two possible angular spread values which can be used.
    Alternatively, the angular spread may have a range of different
    values depending on the distance parameter. In this situation,
    there may be a multiplicity of different angular spread values
35 which can be selected. The angular spread values selectable may
    be discrete values or may have any required value. For example,
    if the first station is able to transmit a signal beam in N
    possible different directions, when the first station and second
    station are greater than the predetermined distance apart, the
40 angular spread may correspond to one direction or possibly two.
    However, when the distance between the first and second station

is less than the predetermined distance, the angular spread may correspond to at least half the total number of directions and even all the directions. In both cases beams used could be determined by an algorithm.

Preferably, the power of the signal beam transmitted by the first station is dependent on the distance parameter. The power of the signal beam being transmitted by the first station may be relatively low if the second station is close to the first station and relatively high if the second station is relatively far from the first station. It is preferred that the transmission power of a first wide beam is less than the transmission power of the second narrow beam. In some embodiments of the present invention, the power of the beam may only have two values, a relatively low value and a higher value. Alternatively, the power of the signal beam can be varied to have a range of different values depending on the distance parameter. The power of the signal beam transmitted by the first station may be calculated so as to be proportional to the angular spread of the transmitted beam. If the beam is relatively narrow, then the power may be relatively high whilst if the beam is a relatively wide, the power may be relatively low. Some closed or open loop power control could be used to control the power. In GSM, closed loop control is used.

When the second station is relatively far from the first station, for example at a distance greater than the predetermined distance, a number of different methods can be used for controlling which of a plurality of beam directions are used. For example, the first station may transmit a signal to the second station in one principal beam direction and in at least one other auxiliary beam direction, the at least one auxiliary beam being adjacent to the principal beam. The ratio of the power of the at least one auxiliary beam to the power of the principal beam may be proportional to the ratio of the strength of the signals received by the first station in that at least one auxiliary direction to said strength of the signals received by

7

the first station in the principal beam direction. Alternatively, where a signal is received from the second station by the first station from two different directions, a first direction corresponding to the beam direction from which the signal is first received and a second direction corresponding to the beam direction from which the signal having the greatest signal strength is received, then the first station may transmit signals in both of said first and second beam directions.

In a further modification, the first station is arranged to detect first and second signals transmitted from the second station, with the second signal being transmitted after the first signal. The directions from which each of the first and second signals received is determined. The first station transmits a signal to the second station. However, when it is determined that the first and second signals from the second station are received by the first station from two different beam directions, a signal is transmitted by the first station to the second station in both the said different beam directions.

According to a second aspect of the present invention, there is provided a first station for directional radio communication in a mobile communication network with a second mobile station, said first station comprising:

receiver means for receiving a signal transmitted by said second station;

transmitter means for transmitting a signal beam from the first station to the second station; and

control means for selectively determining the angular spread of a signal beam for transmitting a signal, said control means being arranged to control said transmitter means so that the angular spread of the signal beam transmitted by the first station is dependent on a parameter representative of the distance between the first and second stations.

Preferably, the first station comprises determining means for determining the distance parameter. The distance parameter

8

may be determined by determining means based on the signals
received by the first station from the second station. The
determining means may determine the angular spread of the signal
received by the first station from the second station and use
this to determine the distance parameter. Alternatively, the
determining means may determine the distance parameter based on
the length of time taken for the signal from the second station
to reach the first station.

In an alternative embodiment, the first station may receive
independently information on the distance parameter.

The control means may control the angular spread of the
transmitted beam to be a first relatively wide beam if the
distance between the first and second stations is greater than
a predetermined distance and to be a second relatively narrow
beam if the distance between the first and second stations is
less than the predetermined distance. Preferably, the
transmission power of the first relatively wide beam is less
than the transmission power of the second, narrow beam. Thus,
the control means may control the transmitter means to transmit
a relatively wide, relatively low power beam when the first
station is relatively close to the second station and a
relatively high power, narrow beam if the second station is
relatively far from the second station.

At least one of the receiver means and the transceiver means
is provided by a directional antenna array. The receiver means
and the transmitter means may be provided by a single antenna
array. This antenna array may be a phased antenna array or may
comprise a plurality of separate directional antennae elements.

It should be appreciated that embodiments of the present
invention can be used in cellular communications network. The
first station may comprise a base transceiver station whilst the
second station may be mobile station. However, it will be
appreciated that embodiments of the present invention have

9

5   applications to other directional radio communication systems
where the first and second stations may both be mobile or may
both be fixed.

It should also be appreciated that the angular spread is
10   defined in terms of the angular spread of the beam.   In
embodiments of the present invention, the required angular spread
may be achieved by providing a plurality of beams. For example,
a narrow angular spread may be achieved by only using one or two
signal beams whilst the wide angular spread could be achieved by
15   using four or more adjacent beams.

According to a third aspect of the present invention, there
is provided a method of directional radio communication in a
cellular mobile communication network between a base station and
20   a mobile station, said method comprising:
      receiving at said base station a signal transmitted by said
mobile station;
      monitoring a parameter representative of the distance
travelled by said signal between the mobile station and the base
25   station; and
      selectively determining the angular spread of a radiation
beam for transmitting a signal from said base station to said
mobile station in dependence on the distance represented by said
parameter, wherein the angular spread of the beam transmitting
30   said signal is reduced for an increased distance.

For a better understanding of the present invention and as
to how the same may be carried into effect, reference will now
be made by way of example to the accompanying drawings in which:
35

      Figure 1 shows a schematic view of a base transceiver
station (BTS) and its associated cell sectors;
      Figure 2 shows a simplified representation of an antenna
array and the base transceiver station;
40   Figure 3 shows the fixed beam pattern provided by the
antenna array of Figure 2;

10

Figure 4 shows a schematic view of the digital signal processor of Figure 2;

Figure 5 illustrates the channel impulse response for four channels, out of eight channels;

Figure 6a shows the angle subtended by signals transmitted by the mobile station at the base transceiver station when the distance between the mobile station and the base transceiver station is greater than a given distance; and

Figure 6b shows the angle subtended by signals transmitted by the mobile station at the base transceiver station when the distance between the mobile station and the base transceiver station is less than the given distance.

Reference will first be made to Figure 1 in which three cell sectors 2 defining a cell 3 of a cellular mobile telephone network are shown. The three cell sectors 2 are served by respective base transceiver stations (BTS) 4. Three separate base transceiver stations 4 are provided at the same location. Each BTS 4 has a separate transceiver which transmits and receives signals to and from a respective one of the three cell sectors 2. Thus, one dedicated base transceiver station is provided for each cell sector 2. The BTS 4 is thus able to communicate with mobile stations (MS) such as mobile telephones which are located in respective cell sector 2.

The present embodiment is described in the context of a GSM (Global System for Mobile Communication) network. In the GSM system, a frequency/time division multiple access F/TDMA system is used. Data is transmitted between the BTS 4 and the MS in bursts. The data bursts include a training sequence which is a known sequence of data. The purpose of the training sequence will be described hereinafter. Each data burst is transmitted in a given frequency band in a predetermined time slot in that frequency band. The use of a directional antenna array allows space division multiple access also to be achieved. Thus, in embodiments of the present invention, each data burst will be

5   transmitted in a given frequency band, in a given time slot, and
     in a given direction. An associated channel can be defined by a
     given data burst transmitted in the given frequency, in the given
     time slot, and in the given direction. As will be discussed in
     more detail hereinafter, in some embodiments of the present
10   invention, the same data burst is transmitted in the same
     frequency band, in the same time slot but in two different
     directions.

     Figure 2 shows a schematic view of one antenna array 6 of
15   one BTS 4 which acts as a transceiver. It should be appreciated
     that the array 6 shown in Figure 2 only serves one of the three
     cell sectors 2 shown in Figure 1. Another two antenna arrays 6
     are provided to serve the other two cell sectors 2. The antenna
     array 6 has eight antenna elements $a_1...a_8$. The elements $a_1...a_8$
20   are arranged to have a spacing of a half wavelength between each
     antenna element $a_1...a_8$ and are arranged in a horizontal row in
     a straight line. Each antenna element $a_1...a_8$ is arranged to
     transmit and receive signals and can have any suitable
     construction. Generally, each antenna element $a_1...a_8$ will be
25   a directional antenna and, for example, each antenna element may
     be a dipole antenna or a patch antenna or any other suitable
     antenna. The eight antenna elements $a_1...a_8$ together define a
     phased array antenna 6.

30   As is known, each antenna element $a_1...a_8$ of the phased
     array antenna 6 is supplied with the same signal to be
     transmitted to a mobile station MS. However, the phases of the
     signals supplied to the respective antenna elements $a_1...a_8$ are
     shifted with respect to each other. The differences in the phase
35   relationship between the signals supplied to the respective
     antenna elements $a_1...a_8$ gives rise to a directional radiation
     pattern. Thus, a signal from the BTS 4 may only be transmitted
     in certain directions in the cell sector 2 associated with the
     array 6. The directional radiation pattern achieved by the array
40   6 is a consequence of constructive and destructive interference
     which arises between the signals which are phase shifted with

12

respect to each other and transmitted by each antenna element $a_1 \ldots a_8$. In this regard, reference is made to Figure 3 which illustrates the directional radiation pattern which is achieved with the antenna array 6. The antenna array 6 can be controlled to provide a beam $b_1 \ldots \ldots b_8$ in any one of the eight directions illustrated in Figure 3. For example, the antenna array 6 could be controlled to transmit a signal to a MS only in the direction of beam b_5 or only in the direction of beam b_6. As will be discussed in further detail hereinafter, it is possible also to control the antenna array 6 to transmit a signal in more than one beam direction at the same time. For example, a signal may be transmitted in the two directions defined by beam b_5 and beam b_6. Figure 3 is only a schematic representation of the eight possible beam directions which can be achieved with the antenna array 6. In practice, however, there will in fact be an overlap between adjacent beams to ensure that all of the cell sector 2 is served by the antenna array 6.

The relative phase of the signal provided at each antenna element $a_1 \ldots \ldots a_8$ is controlled by Butler matrix circuitry 8 so that a signal can be transmitted in the desired beam direction or directions. The Butler matrix circuitry 8 thus provides a phase shifting function. The Butler matrix circuitry 8 has eight inputs 10a-h from the BTS 4 and eight outputs, one to each antenna element $a_1 \ldots a_8$. The signals received by the respective inputs 10a-h comprise the data bursts to be transmitted. Each of the eight inputs 10a-h represents the beam direction in which a given data burst could be transmitted. For example, when the Butler matrix circuitry 8 receives a signal on the first input 10a, the Butler matrix circuitry 8 applies the signal provided on input 10a to each of the antenna elements $a_1 \ldots a_8$ with the required phase differences to cause beam b_1 to be produced so that the data burst is transmitted in the direction of beam b_1. Likewise, a signal provided on input 10b causes a beam in the direction of beam b_2 to be produced and so on.

As already discussed, the antenna elements $a_1 \ldots \ldots a_8$ of the

13

antenna array 6 receive signals from a MS as well as transmit signals to a MS. A signal transmitted by a MS will generally be received by each of the eight antenna elements a_1 ....a_8. However, there will be a phase difference between each of the signals received by the respective antenna elements a_1 ....a_8. The Butler matrix circuitry 8 is therefore able to determine from the relative phases of the signals received by the respective antenna elements a_1 ....a_8 the beam direction from which the signal has been received. The Butler matrix circuitry 8 thus has eight inputs, one from each of the antenna elements a_1 ....a_8 for the signal received by each antenna element. The Butler matrix circuitry 8 also has eight outputs 14a-h. Each of the outputs 14a to 14h corresponds to a particular beam direction from which given data bursts could be received. For example, if the antenna array 6 receives a signal from a MS from the direction of beam b_1, then the Butler matrix circuitry 8 will output the received signal on output 14a. A received signal from the direction of beam b_2 will cause the received signal to be output from the Butler matrix circuitry 8 on output 14b and so on. In summary, the Butler matrix circuitry 8 will receive on the antenna elements a_1 ....a_8 eight versions of the same signal which are phase shifted with respect to one another. From the relative phase shifts, the Butler matrix circuitry 8 determines the direction from which the received signal has been received and outputs a signal on a given output 14a-h in dependence on the direction from which the signal has been received.

It should be appreciated that in some environments, a single signal or data burst from a MS may appear to come from more than one beam direction due to reflection of the signal whilst it travels between the MS and the BTS 4, provided that the reflections have a relatively wide angular spread. The Butler matrix circuitry 8 will provide a signal on each output 14a-h corresponding to each of the beam directions from which a given signal or data burst appears to come. Thus, the same data burst may be provided on more than one output 14a-h of the Butler matrix circuitry 8. However, the signal on the respective

14

5 outputs 14a-h may be time delayed with respect to each other.

Each output 14a-h of the Butler matrix circuitry 8 is
connected to the input of a respective amplifier 16 which
amplifies the received signal. One amplifier 16 is provided for
10 each output 14a-h of the Butler matrix circuitry 8.   The
amplified signal is then processed by a respective processor 18
which manipulates the amplified signal to reduce the frequency
of the received signal to the baseband frequency so that the
signal can be processed by the BTS 4. To achieve this, the
15 processor 18 removes the carrier frequency component from the
input signal.   Again, one processor 18 is provided for each
output 14a-h of the Butler matrix circuitry 8.   The received
signal, which is in analogue form, is then converted into a
digital signal by an analogue to digital (A/D) converter 20.
20 Eight A/D converters 20 are provided, one for each output 14a-h
of the Butler matrix circuitry 8.   The digital signal is then
input to a digital signal processor 21 via a respective input
19a-h for further processing.

25 The digital signal processor 21 also has eight outputs 22a-
h, each of which outputs a digital signal which represents the
signal which is to be transmitted to a given MS. The output 22a-
h selected represents the beam direction in which the signal is
to be transmitted.   That digital signal is converted to an
30 analogue signal by a digital to analogue (D/A) converter 23. One
digital to analogue converter 23 is provided for each output 22a-
h of the digital signal processor 21.   The analogue signal is
then processed by processor 24 which is a modulator which
modulates onto the carrier frequency the analogue signal to be
35 transmitted.   Prior to the processing of the signal by the
processor 24, the signal is at the baseband frequency.   The
resulting signal is then amplified by an amplifier 26 and passed
to the respective input 10a-h of the Butler matrix circuitry 8.
A processor 24 and an amplifier 26 are provided for each output
40 22a-h of the digital signal processor 21.

5   Reference will now be made to Figure 4 which schematically
       illustrates the digital signal processor 21. It should be
       appreciated that the various blocks illustrated in Figure 4 do
       not necessarily correspond to separate elements of an actual
       digital signal processor 21 embodying the present invention. In
10   particular, the various blocks illustrated in Figure 4 correspond
       to various functions carried out by the digital signal processor
       21. In one embodiment of the present invention, the digital
       signal processor 21 is at least partially implemented in
       integrated circuitry and several functions may be carried out by
15   the same element.

       Each signal received by the digital signal processor 21 on
       the respective inputs 19a-h is input to a respective channel
       impulse response (CIR) estimator block 30. The CIR estimator
20   block 30 includes memory capacity in which the estimated channel
       impulse response is stored. The CIR estimator block also includes
       memory capacity for temporarily storing the received signal. The
       channel impulse response block 30 is arranged to estimate the
       channel impulse response of the channel of the respective input
25   19a-h. As already discussed an associated channel can be defined
       for the given data burst transmitted in the selected frequency
       band, the allocated time slot and the beam direction from which
       the signal is received for a single data burst. The beam
       direction from which a signal is received is ascertained by the
30   Butler matrix circuitry 8 so that a signal received at input 19a
       of the digital signal processor represents mainly the signal that
       has been received from the direction of beam b_1 and so on. It
       should be appreciated that the signal received at a given input
       may also include the side lobes of the signal received on, for
35   example, adjacent inputs.

       Each data burst which is transmitted from a mobile station
       MS to the BTS 4 includes a training sequence TS. However, the
       training sequence TS_{RX} which is received by the BTS 4 is affected
40   distorted due to noise and also due to multipath effects which
       leads to interference between adjacent bits of the training

16

5   sequence. This latter interference is known as intersymbol
       interference. TS_{RX} is also affected by interference from other
       mobile stations, for example mobile stations located in other
       cells or cell sectors using the same frequency may cause co-
       channel interference. As will be appreciated, a given signal
10   from the MS may follow more than one path to reach the BTS and
       more than one version of the given signal may be detected by the
       antenna array 6 from a given direction. The training sequence
       TS_{RX} which is received from input 19a is cross correlated by the
       CIR estimator block 30 with a reference training sequence TS_{REF}
15   stored in a data store 32. The reference training sequence TS_{REF}
       is the same as the training sequence which is initially
       transmitted by the mobile station. In practice the received
       training sequence TS_{RX} is a signal modulated onto a carrier
       frequency while the reference training sequence TS_{REF} is stored
20   as a bit sequence in the data store 32. Accordingly, before
       cross-correlation is carried out, the stored reference training
       sequence is similarly modulated. In other words the distorted
       training sequence received by the BTS 4 is correlated with the
       undistorted version of the training sequence. In an alternative
25   embodiment of the invention, the received training sequence is
       demodulated prior to its correlation with the reference training
       sequence. In this case, the reference training sequence would
       again have the same form as the received training sequence. In
       other words, the reference training sequence is not modulated.

30

       The reference training sequence TS_{REF} and the received
       training sequence TS_{RX} each are of length L corresponding to L
       bits of data and may for example be 26 bits. The exact location
       of the received training sequence TS_{RX} within the allocated time
35   slot may be uncertain. This is because the distance of the
       mobile station MS from the BTS 4 will influence the position of
       the data burst send by the MS within the allotted time slot. For
       example, if a mobile station MS is relatively far from the BTS
       4, the training sequence may occur later in the allotted time
40   slot as compared to the situation where the mobile station MS is
       close to the BTS 4.

17

5   To take into account the uncertainty of the position of the
received training sequence TS_{RX} within the allotted time slot,
the received training sequence TS_{RX} is correlated with the
reference training sequence TS_{REF} n times. Typically, n may be 7
or 9. It is preferred that n be an odd number. The n
10   correlations will typically be on either side of the maximum
obtained correlation. However, the relative position of the
received training sequence TS_{RX} with respect to the reference
training sequence TS_{REF} is shifted by one position between each
successive correlation. Each position is equivalent to one bit
15   in the training sequence and represents one delay segment. Each
single correlation of the received training sequence TS_{RX} with
the reference training sequence TS_{REF} gives rise to a tap which
is representative of .the channel impulse response for that
correlation. The n separate correlations gives rise to a tap
20   sequence having n values.

Reference is now made to Figure 5 which shows the channel
impulse response for four of the eight possible channels
corresponding to the eight spacial directions. In other words,
25   Figure 5 shows the channel impulse response for four channels
corresponding to a given data burst received in four of the eight
beam directions from the mobile station, the data burst being in
a given frequency band and in a given time slot. The x axis of
each of the graphs is a measure of time delay whilst the y axis
30   is a measure of relative power. Each of the lines (or taps)
marked on the graph represents the multipath signal received
corresponding to a given correlation delay. Each graph will have
n lines or taps, with one tap corresponding to each correlation.

35   From the estimated channel impulse response, it is possible
to determine the location of the training sequence within the
allotted time slot. The largest tap values will be obtained when
the best correlation between the received training sequence TS_{RX}
and the reference training sequence TS_{REF} is achieved.   ·
40

The CIR estimator block 30 also determines for each channel

18

the five (or any other suitable number) consecutive taps which give the maximum energy. The maximum energy for a given channel is calculated as follows:

$$E = \sum_{j=1}^{5} (h_j)^2$$

where h represents the tap amplitude resulting from a cross correlation of the reference training sequence TS_{REF} with the received training sequence TS_{RX}. The CIR estimator block 30 calculates the maximum energy for a given channel by using a sliding window technique. In other words, the CIR estimator block 30 considers each set of five adjacent values and calculates the energy from those five values. The five adjacent values giving the maximum energy are selected as representative of the impulse response of that channel. The energy can be regarded as being a measure of the relative strength of the desired signal from a given mobile received by the BTS 4 from a given direction. This process is carried out for each of the eight channels which represent the eight different directions from which the same data burst can be received. The signal which is received with the maximum energy has followed a path which provides the minimum attenuation of that signal.

An analysis block 34 is provided which stores the maximum energy calculated by the CIR estimator block 30 for the respective channel for the five adjacent values selected by the CIR estimator block as being representative of the channel impulse response.

The analysis block 34 may also analyse the channel impulse responses determined by the CIR estimator block 30 to ascertain the minimum delay. The delay is a measure of the position of the received training sequence TS_{RX} in the allotted time slot and hence is a relative measure of the distance travelled by a signal between the mobile station and the BTS 4. The channel with the minimum delay has the signal which has travelled the shortest

distance. This shortest distance may in certain cases represent
the line of sight path between the mobile station MS and the BTS
4.

The analysis block 34 is arranged to determine the position
of the beginning of the window determining the five values
providing the maximum energy. The time delay is then determined
based on the time between a reference point and the beginning of
the window. That reference point may be the common time when the
training sequences in each branch start to be correlated, the
time corresponding to the earliest window edge of all those
branches or a similar common point. In order to accurately
compare the various delays of the different channels, a common
timing scale is adopted which relies on the synchronisation
signal provided by the BTS 4 in order to control the TDMA mode
of operation. In other words, the position of the received
training sequence TS_{RX} in the allotted time slot is a measure of
the time delay. It should be appreciated that in known GSM
systems, the delay for a given channel is calculated in order to
provide timing advance information. Timing advance information
is used to ensure that a signal transmitted by the mobile station
to the BTS falls within its allotted time slot. The timing
advance information can be determined based on the calculated
relative delay and the current timing advance information. If the
mobile station MS is far from the base station, then the MS will
be instructed by the BTS to send its data burst earlier than if
the mobile station MS is close to the BTS.

The results of the analysis carried out by each of the
analysis blocks 34 are input to a processor block 36 which
determines whether the distance between the mobile station MS and
the base transceiver station 4 is greater or less than a
predetermined critical value. It should be appreciated that this
critical value is dependent on the characteristics of the
particular cell and could vary from cell to cell. Typically, the
critical value may be around 0.5 to 1 kilometer. The following
two methods can be used by the processor block 36 in order to

5   determine the distance between the mobile station and the base
      transceiver station. Firstly, the timing advance information can
      be used.

      An alternative way of determining the distance between the
10   mobile station and the BTS 4 is to rely on the angle subtended
      by the received signal at the BTS. From the channel impulse
      response calculated for each of the eight channels, it is
      possible to make an estimate of the angle subtended by the
      received signal at the BTS. If the mobile station is beyond the
15   critical distance from the BTS 4, then the angle subtended by the
      received signal at the BTS will be relatively narrow as
      illustrated in Figure 6a. If the angle subtended at the BTS is
      relatively narrow, then the signal from the MS will be strongly
      received only in a limited number of directions, for example one,
20   two or possibly three. On the other hand, if the distance
      between the BTS 4 and the MS is below the critical distance, the
      angle subtended at the BTS will be relatively wide as illustrated
      in Figure 6b. The signal received from the MS will be received
      on a relatively large number of channels for example four or more
25   and the signal will be received with a similar strength on each
      of the four or more channels.

      By looking at the energy of each channel, the processor
      block 36 ascertains the number of channels on which a signal is
30   received. If the signal on a given channel is weak, then the
      signal received on that channel may be ignored. From the number
      of channels on which the signal is received, it can be determined
      if the angle subtended by the received signal has a wide or
      narrow angular spread and hence whether the distance between the
35   MS and the BTS is greater than or less than the critical value.

      If the distance between the mobile station and the BTS 4 is
      greater than the critical value R_c, then only one or two beam
      directions only will be used to transmit a signal to that mobile
40   station. On the other hand, if the distance between a mobile
      station and the BTS 4 is less than the critical value R_c, the

signal to be transmitted to the MS will be transmitted over a
relatively large number of beams.

In one modification to the present invention, when the
distance between the BTS 4 and the MS is determined to be greater
than the critical distance, then the processor block 36 compares
the maximum energy determined for each channel and also compares
the determined delay for each channel. The processor block 36
ascertains which channel has the maximum energy for a given data
burst in a given frequency band in a given time slot. This means
that the beam direction from which the strongest version of a
given data burst is received can be ascertained. The processor
block 36 also ascertains which of the channels has a minimum
delay. In other words, the version of the data burst which has
followed the shortest path can be ascertained. The processor
block 36 then checks to see whether or not the channel having the
maximum energy is the same as the channel having the minimum
delay. If these channels are the same the processor block 36
outputs a signal to generating block 38 indicating that the next
signal to the mobile station in question should be transmitted
in the single beam direction from which the signal having the
greatest strength and shortest path has been received.

If, however, the channel which has the greatest energy is
not the same as the channel which has the signal which first
reaches the BTS 4, the processor block 36 outputs a signal to
generating block 38 indicating that the next signal to be
transmitted to the mobile station MS, from which the data burst
has been received, should be transmitted in two beam directions.
One direction will correspond to the beam direction from which
the strongest signal is received and the other direction will
correspond to the beam direction from which the data burst is
first received. For example, if the comparison block 36
ascertains that the strongest signal has been input to the
digital signal processor 21 on input 19b whilst the signal which
first reaches the BTS 4 has been input to the digital signal
processor 21 via input 19d, the signal from the BTS to the mobile

22

would be transmitted in the directions of beams b_2 and b_4. In
those circumstances, the signal to be transmitted would be output
by the generating block 38 on outputs 22b and 22d of the digital
signal processor 21.

In an alternative modification to the present invention,
when the distance between the BTS 4 and the MS is determined to
be greater than a critical distance, then the processor block 36
compares the channel impulse response determined for each channel
and selects a principal beam direction. The principal beam
direction may be the direction from which the signal having the
greatest energy is received or alternatively may be the direction
from which the signal having the least delay is received. The
processor block 36 then selects two auxiliary beam directions,
these auxiliary beam directions being immediately adjacent to the
principal direction. In other words, if the beam b_3 is the
principal beam, then beams b_2 and b_4 will be the auxiliary beams.
The processor block 36 also selects the power level for the
principal beam. The power of the principal beam may be selected
in accordance with the strength of the signal received from the
mobile station in that principal beam direction or indeed by
using any other suitable method. The power of each of the
auxiliary beams is then set in accordance with the power selected
for the principal beam. For example, the ratio of the power in
the principal beam direction to the power in one of the auxiliary
beam directions is proportional to the ratio of the signal level
received in the principal beam direction from the mobile station
to the signal level received in that auxiliary beam direction
from the mobile station. Generally, the power of the auxiliary
beams will be less than that of the principal beam.

In a further modification to the present invention, when the
distance between the BTS 4 and the MS is determined to be greater
than the critical distance, then the comparison block selects a
direction from which the signal from the mobile station is deemed
to be received. That may be the direction from which the signal
having the greatest energy is received or alternatively may be

5   the direction from which the signal having the least delay is
       received.   Processor block 36 stores this beam direction and
       carries out the same procedure for the next data burst received
       from the mobile station.   The directions from which the two
       consecutive signals have been received from the mobile station
10   are compared.   If the two directions are the same, then the
       signal from the BTS will be transmitted to the mobile station in
       that determined beam direction.   If, on the other hand,
       consecutive data bursts from the mobile station are deemed to
       come from different directions, then the next signal transmitted
15   by the BTS 4 to the MS will be in both of those beam directions.

       The strength of the signal transmitted by the BTS 4 to the
       MS will depend on the distance between the BTS and MS. When the
       distance between the MS and the BTS is determined to be less than
20   the critical distance, the signal transmitted to the MS in the
       relatively large number of beam directions has a first relatively
       low power level.   However, when it is determined that the
       distance between the MS and the BTS 4 is greater than the
       critical distance, then the power of the signal transmitted in
25   the one or two beam directions has a second, higher power level.
       Instead of just having two different power levels, the power of
       the signal transmitted by the BTS can have a range of possible
       values, depending on the distance between the MS and the BTS.
       Based on the determined distance between the MS and the BTS, the
30   processor block 36 determines the appropriate signal level based
       on the distance between the MS and the BTS and will output signal
       level information along with the information on the selected beam
       direction to the generating block 38.   For example, a closed loop
       system can be used to determine the power level when the distance
35   is greater than the critical system.   Such a closed loop system
       is used in the GSM system.

       Generating block 38 is responsible for generating the
       signals which are to be output from the digital signal processor
40   21.   The generating block 38 has an input 40 representative of
       the speech and/or information to be transmitted to the mobile

24

station MS. Generating block 38 is responsible for encoding the speech or information to be sent to the mobile station MS and includes a training sequence and a synchronising sequence within the signals. Generating block 38 is also responsible for production of the modulating signals. Based on the generated signal and determined beam direction, generating block 38 provides signals on the respective outputs 22a-h of the digital signal processor 21. The generating block 38 also provides an output 50 which is used to control the amplification provided by amplifiers 24 to ensure that the signals in the required beam direction or directions have the required power levels which are selected by the processor block 36.

The output of the channel impulse response block 30 is also used to equalise and match the signals received from the mobile station MS. In particular, the effects of intersymbol interference resulting from multipath propagation can be removed or alleviated from the received signal by the matched filter (MF) and equalizer block 42. It should be appreciated that the matched filter (MF) and equalizer block has an input (not shown) to receive the received signal from the MS. The output of each block 42 is received by recovery block 44 which is responsible for recovering the speech and/or the information sent by the MS. The steps carried out by the recovery block include demodulating and decoding the signal. The recovered speech or information is output on output 48.

In one modification, the wide angular spread can be achieved by field modulation.

In one modification to the described embodiment, if the distance between the mobile and the BTS is greater than the critical distance, there is normal beam and power control, for example as in the GSM system. However, if the distance between the mobile and the BTS is less than the critical distance, the beams which are selected are fixed and a fixed power level is also used.

25

It should be appreciated that whilst the above described embodiment has been implemented in a GSM cellular communication network, it is possible that the present invention can be used with other digital cellular communication networks as well as analogue cellular networks. The above described embodiment uses a phased array having eight elements. It is of course possible for the array to have any number of elements. Alternatively, the phased array could be replaced by discrete directional antennae each of which radiates a beam in a given direction. The Butler matrix circuitry can be replaced by any other suitable phase shifting circuitry, where such circuitry is required. The Butler matrix circuitry is an analogue beam former. It is of course possible to use a digital beam former DBF or any other suitable type of analogue beam former. The array may be controlled to produce more than eight beams, even if only eight elements are provided, depending on the signals supplied to those elements.

It is also possible for a plurality of phased arrays to be provided. The phased arrays may provide a different number of beams. When a wide angular spread is required, the array having the lower number of elements is used and when a relatively narrow is required, the array having the larger number of elements is used.

As will be appreciated, the above embodiment has been described as providing eight outputs from the Butler matrix circuitry. In practice a number of different channels will be output on each output of the Butler matrix at the same time. Those channels may be on different frequency bands. The channels for different time slots will also be provided on the respective outputs. Whilst individual amplifiers, processors, analogue to digital converters and digital to analogue converters have been shown, these in practice may be each provided by a single element which has a plurality of inputs and outputs.

It should be appreciated that embodiments of the present invention have applications other than just in cellular

26

5   communication networks. For example, embodiments of the present invention may be used in any environment which requires directional radio communication. For example, this technique may be used in PMR (Private Mobile Radio) or the like.

CLAIMS

1.   A method of directional radio communication in a mobile communication network between a first station and a second mobile station, said method comprising the steps of:
        receiving at said first station a signal transmitted by said second station;
        monitoring a parameter representative of the distance between the second station and the first station; and
        transmitting a signal beam from said first station to said second station, wherein the angular spread of the signal beam transmitted by the first station is dependent on the distance between the first and second stations.

2.   A method as claimed in claim 1, wherein the parameter is monitored at the first station.

3.   A method as claimed in claim 2, wherein the parameter is the angular spread of the signal received by the first station from the second station.

4.   A method as claimed in claim 2, wherein the parameter is determined based on the length of time taken for the signal from the second station to reach the first station.

5.   A method as claimed in claim 1 or 2, wherein said parameter is timing advance information normally provided for controlling communication of data between the mobile station and the first station.

6.   A method as claimed in any preceding claim, wherein the angular spread of the radiation beam is selectable from a first relatively wide beam and a second relatively narrow beam, wherein the first wide beam is selected if the distance between the first station and the second station is less than a predetermined distance and the second beam is selected if the distance between

28

5   the first station and the second station is less than the
       predetermined distance.

       7.   A method as claimed in any preceding claim, wherein the
       power of the signal beam transmitted by the first station is
10   dependent on the distance parameter.

       8.   A method as claimed in claim 6 and 7, wherein the
       transmission power of the first wide beam is less than the
       transmission power of the second narrow beam.
15
       9.   A method as claimed in any preceding claim, wherein said
       first station comprises a base transceiver station of a cellular
       communications network and the second station is a mobile
       station.
20
       10.   A method of directional radio communication in a cellular
       mobile communication network between a base station and a mobile
       station, said method comprising:
             receiving at said base station a signal transmitted by said
25   mobile station;
             monitoring a parameter representative of the distance
       travelled by said signal between the mobile station and the base
       station; and
             selectively determining the angular spread of a radiation
30   beam for transmitting a signal from said base station to said
       mobile station in dependence on the distance represented by said
       parameter, wherein the angular spread of the beam transmitting
       said signal is reduced for an increased distance.

35   11.   A first station for directional radio communication in a
       mobile communication network with a second mobile station, said
       first station comprising:
             receiver means for receiving a signal transmitted by said
       second station;
40   transmitter means for transmitting a signal beam from the
       first station to the second station; and

29

control means for selectively determining the angular spread of a signal beam for transmitting a signal, said control means being arranged to control said transmitter means so that the angular spread of the signal beam transmitted by the first station is dependent on a parameter representative of the distance between the first and second stations.

12. A first station as claimed in claim 11, wherein said control means is arranged to control the angular spread of the transmitted beam to be a first relatively wide beam if the distance between the first and second stations is greater than a predetermined distance and to be a second relatively narrow beam if the distance between the first and second stations is less than the predetermined distance.

13. A first station as claimed in claim 12, wherein the transmission power of the first relatively wide beam is less than the transmission power of the second narrow beam.

14. A first station as claimed in any of claims 11 to 13, wherein the transmitter means and the receiving means are provided by an antenna array which is arranged to provide a plurality of beam directions for transmitting a radiation beam, wherein at least one of said beam directions can be selected for a given signal.

FIG. 1

FIG. 3

FIG.2

FIG. 4
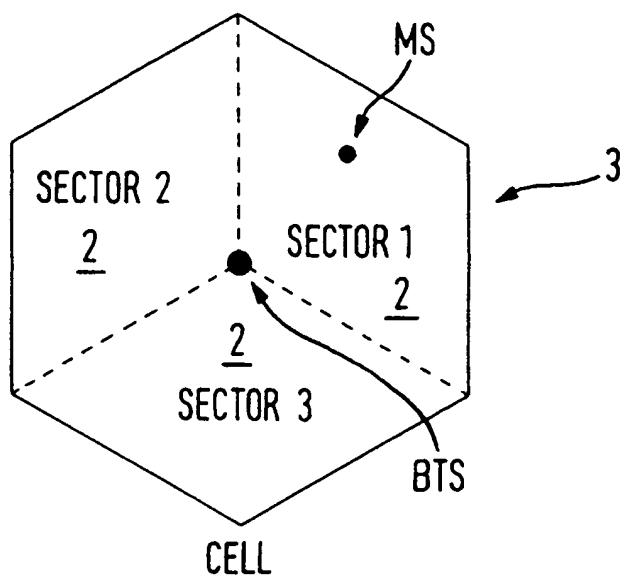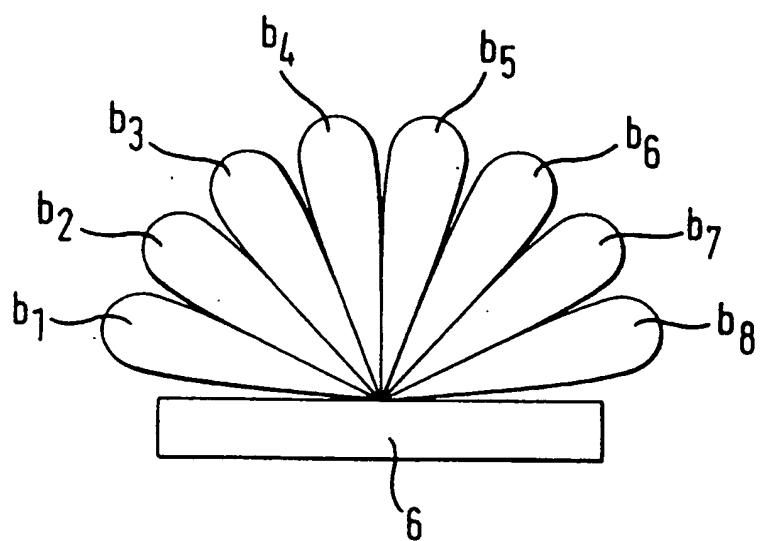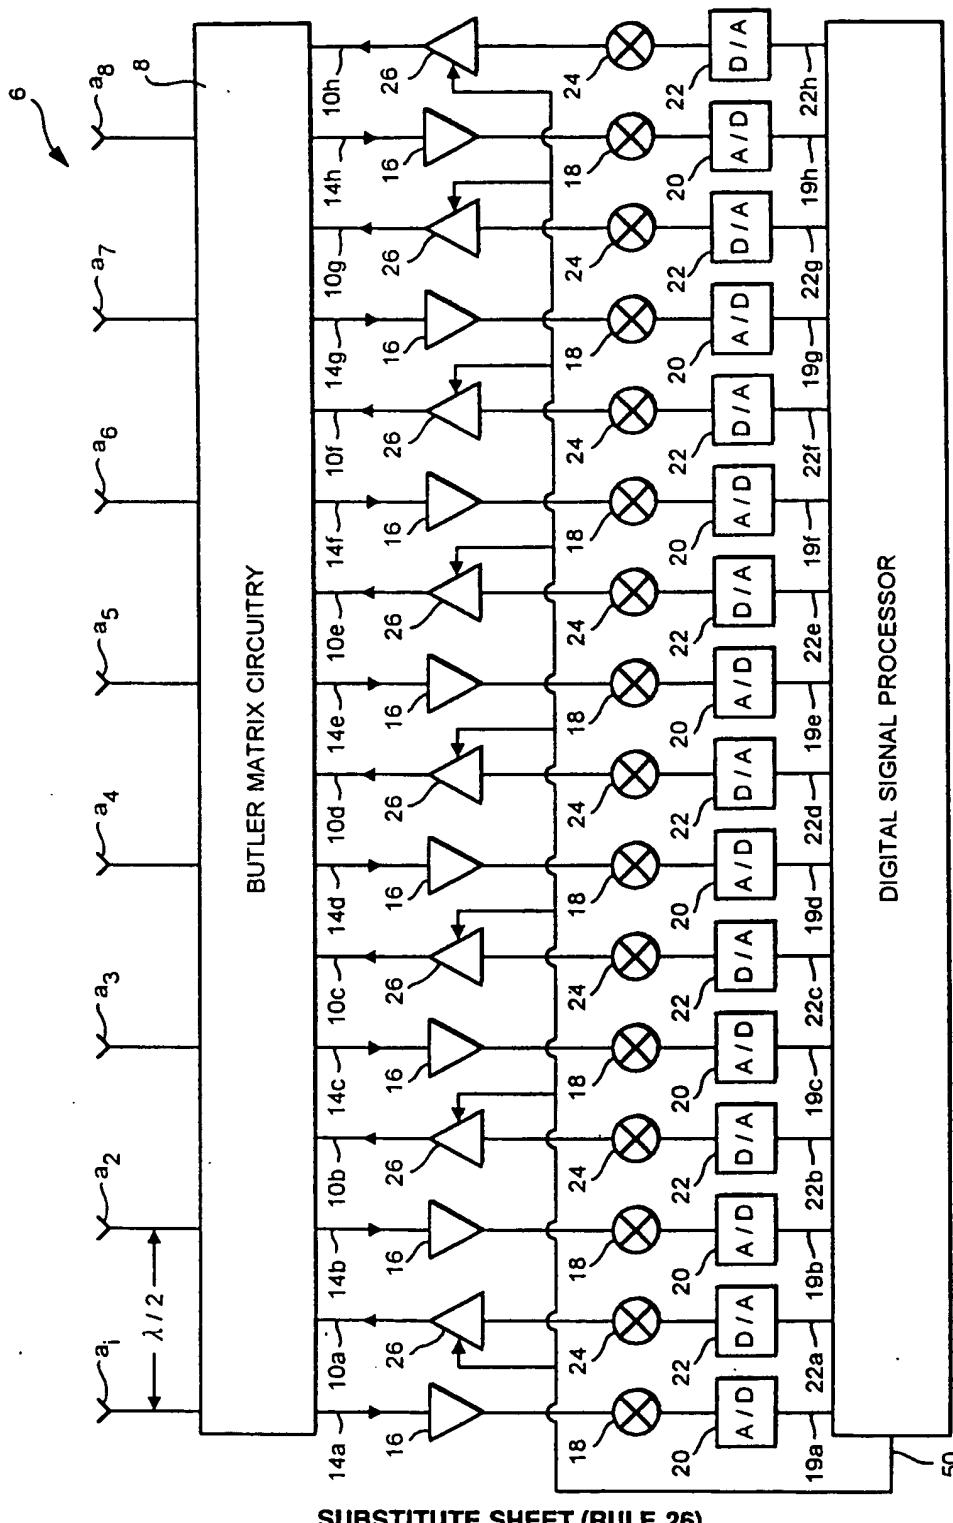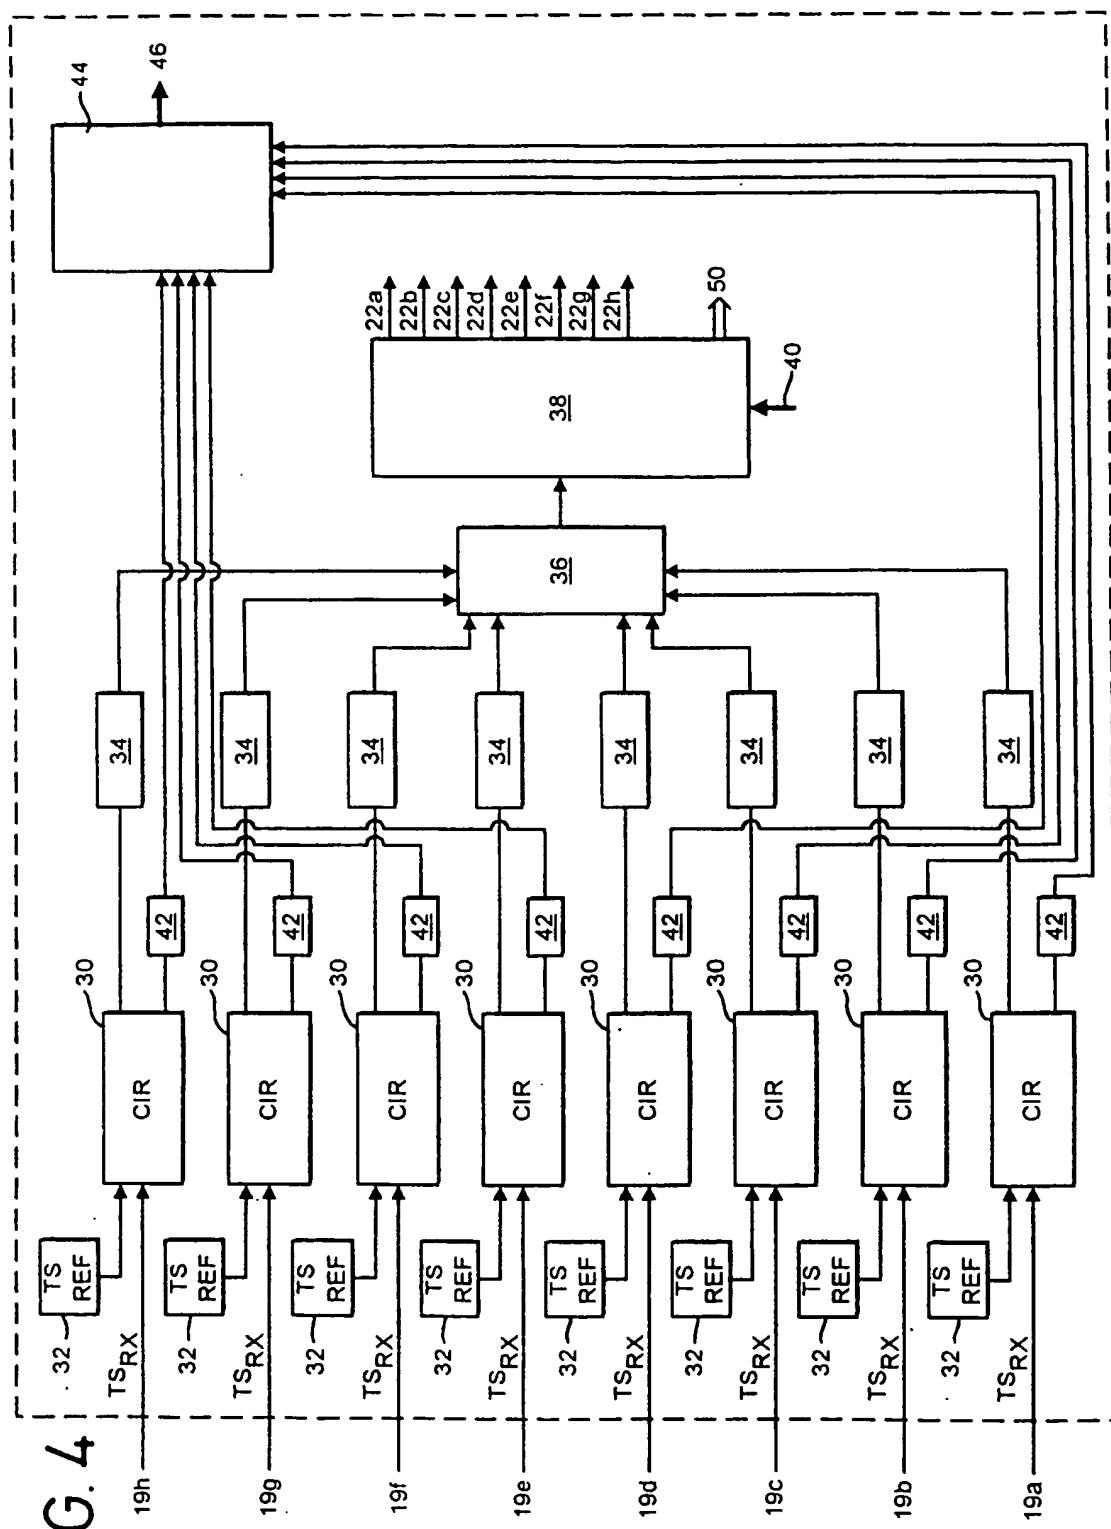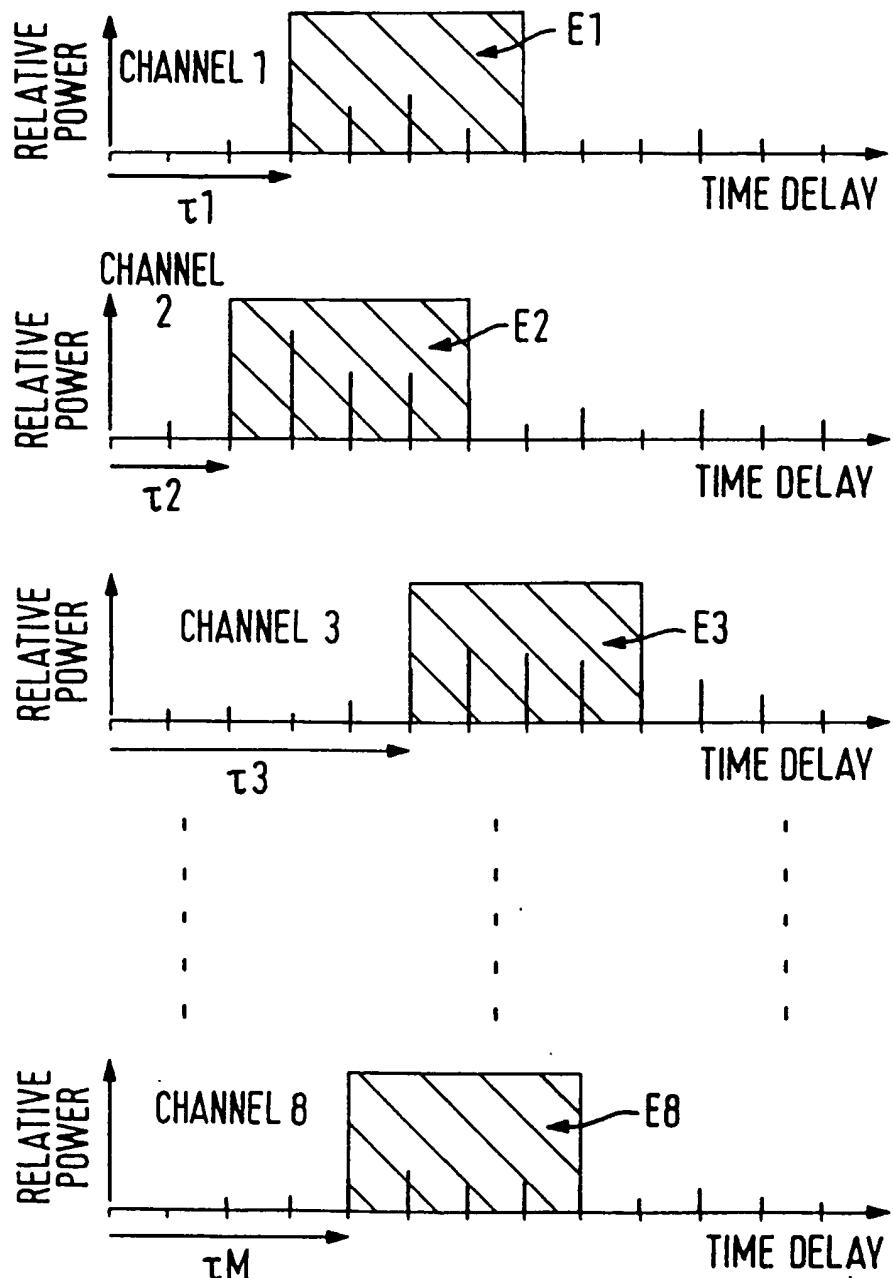
FIG. 5

5 / 5
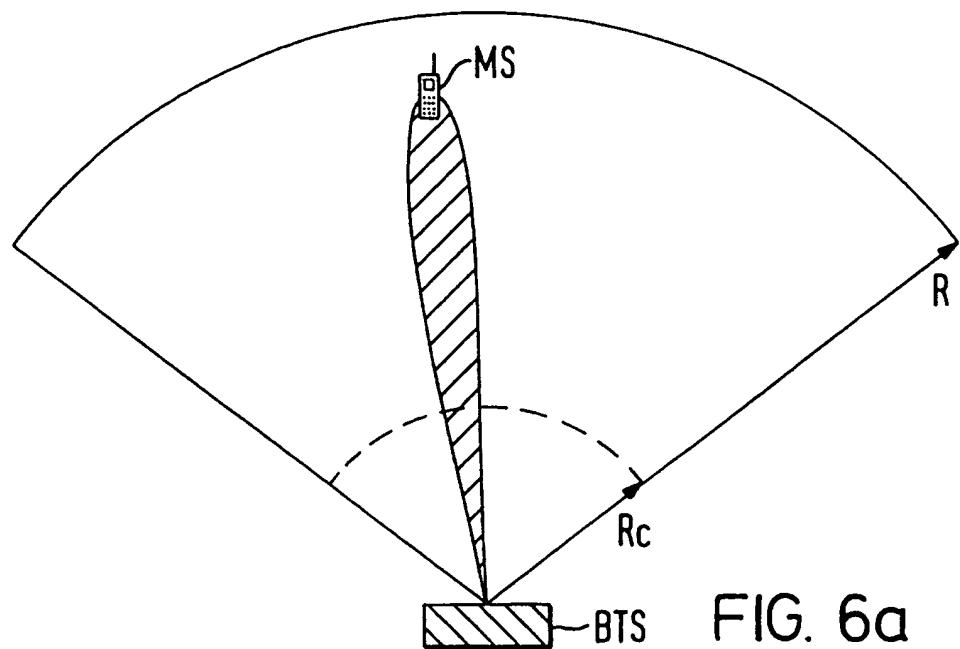
FIG. 6a

FIG. 6b

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6   H04Q7/36

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6   H04Q   H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 729 285 A (SEL ALCATEL AG ;ALCATEL NV (NL)) 28 August 1996 see column 3, line 20 - column 7, line 26 see claims 1-3 see figure 4	1-14
A	EP 0 647 978 A (NORTHERN TELECOM LTD) 12 April 1995 see column 8, line 2-53 see column 10, line 35 - column 12, line 30 see column 13, line 38 - column 15, line 26	1-14

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publicationdate of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of theinternational search	Date of mailing of the international search report
16 March 1998	24/03/1998

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Roberti, V

Form PCT/ISA/210 (second sheet) (July 1992)

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0729285 A	28-08-96	DE 19506439 A	29-08-96
		AU 4443996 A	05-09-96
		CA 2170210 A	25-08-96
		FI 960843 A	25-08-96
		JP 8265837 A	11-10-96
		NZ 280989 A	24-03-97
EP 0647978 A	12-04-95	GB 2281007 A	15-02-95
		GB 2281008 A	15-02-95
		GB 2281010 A	15-02-95
		GB 2281009 A	15-02-95
		GB 2281011 A	15-02-95
		GB 2281175 A	22-02-95
		GB 2281176 A	22-02-95
		GB 2281012 A	15-02-95
		EP 0647979 A	12-04-95
		EP 0647980 A	12-04-95
		EP 0647981 A	12-04-95
		EP 0647982 A	12-04-95
		EP 0647983 A	12-04-95
		EP 0639035 A	15-02-95
		JP 7079476 A	20-03-95
		US 5596329 A	21-01-97
		US 5602555 A	11-02-97
		US 5714957 A	03-02-98
		US 5570098 A	29-10-96
		US 5576717 A	19-11-96
		US 5565873 A	15-10-96
		US 5666123 A	09-09-97